

Zone360, Zone360X Upper Air UV

Researched, tested, and study-backed, the Zone360 upper air ultraviolet germicidal irradiation (UVGI or UV) system harnesses the power of short-wavelength UV-C light to help kill pathogens or render them harmless. UV is a well-established means of disinfection used to help prevent the spread of certain infectious diseases.

The Zone360 is suitable for indoor environments, including spaces with no HVAC in place, that need immediate airflow, circulation, and disinfection. Also helps reduce pathogens that settle out of the air and onto surfaces. The Zone360 can help reduce both the air pathogen load and, in combination with normal surface cleaning procedures, help further reduce the surface pathogen load.

Indoor environments that would benefit from the Zone360 include, but are not limited to:





Zone360, Zone360X

- Healthcare (e.g., doctor's offices, nurse's stations, dental offices, nursing homes)
- Learning (e.g., daycare centers, schools)
- Food packing, prep, and service (e.g., restaurants, grocery stores, butchers, bakeries)
- Retail and service (e.g., gyms, shops, spas, salons)
- Animal care (e.g., veterinary clinics, pet boarding facilities, doggie daycares, grooming salons, animal shelters)
- Law enforcement (e.g., police stations, jails)
- Temporary housing (e.g., emergency, homeless, and transitional shelters)

Short Form Specs


- Fits 2' x 2' or 2' x 4' ceiling grid.
- Designed for 500-1,000 sq. ft. rooms.
- Requires at least 8 ft ceiling heights and 120V to operate.
- Ceiling mounted or suspended by a cable/chain.
- Direct wired, plugged into a receptacle, or directly connected to an HVAC supply duct.
- Zone360X also includes remote control and option of three fan speeds.
- Designed with louvers to collimate UV-C rays and keep them away from occupants, below. *Not to be used in rooms with reflective (e.g., metal) walls.*
- Constructed of stainless steel and non-corrosive aluminum.
- Manufactured in the USA.

Zone360, Zone360X Upper Air UV

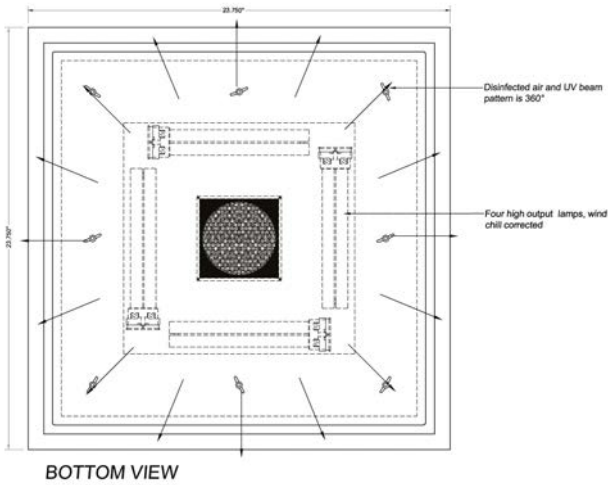

Fixture can now be powered & tested AFTER taking UV protective measures.
UV protective measures

WARNING: Temporary eye damage may result from DIRECTLY viewing the light produced by these lamps. To reduce the risk of exposure to UV-radiation, take UV-radiation protective measures for personnel during servicing. **WEAR EYE & SKIN PROTECTION.**



Carefully align lamp base inside lamp holder between the metal tabs inside the holder and aligning with pins on lamp base & the slots in the holder. Push lamp in until it snaps in place.

Larger scale provided with installation instructions.

Construction	
Housing:	Powder-coated steel (off white)
Face plate:	Stainless steel
Louver:	Powder-coated aluminum (black)

Weight	
Zone360	
Product:	28.5 lbs
Package:	35.5 lbs
Zone360X	
Product:	29.5 lbs
Package:	36.5 lbs

Electrical	
Voltage:	120V only
Amps	
Zone360:	1.6
Zone360X:	2.4

Warranty	
Aerapy's UVGI system warranty	
Device:	Five (5) years
Fan:	One (1) year
UV-C lamp:	9,000 hours (one year for 24/7 operation)

Dimensions (H x W x D)	
Product:	23-3/4" x 23-3/4" x 5"
Package:	27" x 27" x 9"

UV-C	
Wavelength:	253.7nm
Ozone:	Produces no ozone

Fan	
Zone360:	100cfm
Zone360X:	100cfm, 200cfm, 530cfm

Installation	
Ceiling material	
Drop ceiling:	Fits perfectly into 2' x 2' or 2' x 4'
Other ceiling:	Use cable or chain from ceiling
Wiring:	Direct wire